


HDWK


Wand-/ Hängestielausleger geschweißt

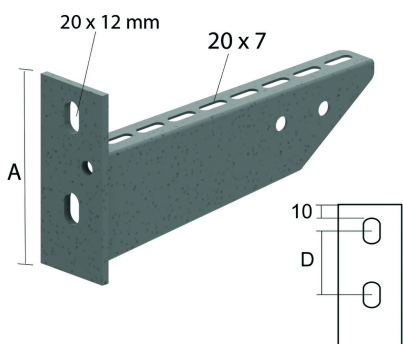

| | Max. Belastung (in daN) | A | D |
|---------|-------------------------|-------|------|
| HDWK100 | 120 | 106,5 | 46,5 |
| HDWK150 | 230 | 112 | 52 |
| HDWK200 | 340 | 116 | 56 |
| HDWK300 | 320 | 125 | 65 |
| HDWK400 | 430 | 134 | 74 |


| Referenz | ↕ mm | ↔ mm | → ← mm | ↔ mm | kg/stk | 📦 | Einheit |
|----------------|---------|---------|------------|---------|--------|----|---------|
| HDWK100 | 106 | 117 | | | 0,300 | 12 | STK |
| HDWK150 | 112 | 167 | | | 0,360 | 12 | STK |
| HDWK200 | 116 | 217 | | | 0,430 | 12 | STK |
| HDWK300 | 125 | 317 | | | 0,730 | 12 | STK |
| HDWK400 | 134 | 417 | | | 0,880 | 6 | STK |

Zu befestigen mit:



Sechskantschraube (DIN 933)
B

Sechskantmutter (DIN 934)
M



Großflächenunterlegscheibe (DIN 9021)
CRO

Verwenden Sie B12.50 + CRO12 + M12 für symmetrische Befestigung.

