


# HDWK


## Wand-/ Hängestielausleger geschweißt

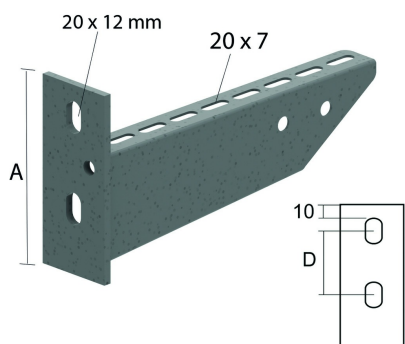

	Max. Belastung (in daN)	A	D
HDWK100	120	106,5	46,5
HDWK150	230	112	52
HDWK200	340	116	56
HDWK300	320	125	65
HDWK400	430	134	74


Referenz	↕ mm	↔ mm	→  ← mm	↔ mm	kg/stk	📦	Einheit
<b>HDWK100</b>	106	117			0,300	12	STK
<b>HDWK150</b>	112	167			0,360	12	STK
<b>HDWK200</b>	116	217			0,430	12	STK
<b>HDWK300</b>	125	317			0,730	12	STK
<b>HDWK400</b>	134	417			0,880	6	STK

**Zu befestigen mit:**



Sechskantschraube (DIN 933)  
B

Sechskantmutter (DIN 934)  
M



Großflächenunterlegscheibe (DIN 9021)  
CRO

Verwenden Sie B12.50 + CRO12 + M12 für symmetrische Befestigung.

