


# KBS60

## Kabelrinne Längs-/Querlochung

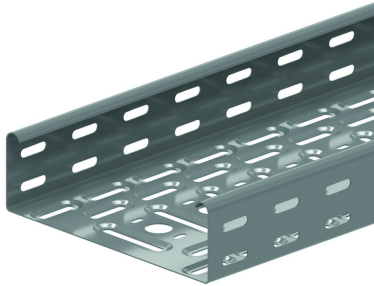

Max. Belastung: 10 daN

Referenz	Oberfläche	↕ mm	↔ mm	→  ← mm	↔ mm	kg/m	📦	Einheit
<b>KBS60.100.150</b>	-	60	100	1,5	3000	2,549	60	M
<b>KBS60.150.150</b>	-	60	150	1,5	3000	3,124	30	M
<b>KBS60.200.150</b>	-	60	200	1,5	3000	3,687	30	M
<b>KBS60.300.150</b>	-	60	300	1,5	3000	4,780	30	M
<b>ZMKBS60.100.150</b>	DF	60	100	1,50	3000	2,549	60	M
<b>ZMKBS60.150.150</b>	DF	60	150	1,50	3000	3,124	30	M
<b>ZMKBS60.200.150</b>	DF	60	200	1,50	3000	3,687	30	M
<b>ZMKBS60.300.150</b>	DF	60	300	1,50	3000	4,780	30	M

### Legenden Oberfläche

- DF = Defender