


P3301T10

Befestigungsprofil doppelseitig H41 gelocht M10

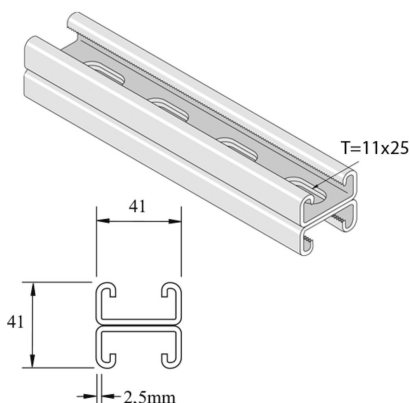

Standardausführung	Tauchfeuerverzinkt
Ausführung Option PE	DUPLEX (Tauchfeuerverzinkung plus Polyester-Pulverbeschichtung)

HD	Referenz	↑ mm	↔ mm	→ ← mm	↔ mm	kg/m	📦	Lager	Einheit
-	P3301	41	41	2,5	6000	3,760	6		M
-	P3301TH	41	41	2,5	6000	3,246	6		M
-	P3301T10PG	41	41	2,5	6000	3,530	6	X	M
-	P3301T10H	41	41	2,5	6000	3,530	6	X	M
-	P3301T10DF	41	41	2,5	6000	3,530	6	X	M
-	P3301T10PGX3	41	41	2,5	3000	3,530	3	X	M
-	P3300T10DFX3	21	41	2,5	3000	1,706	3		M

Abkürzung:

- ZP = Verzinkt
- HG = Tauchfeuerverzinkt
- DF = Defender