


VGLI28
Unterflurkanal leicht integr. Verbinder

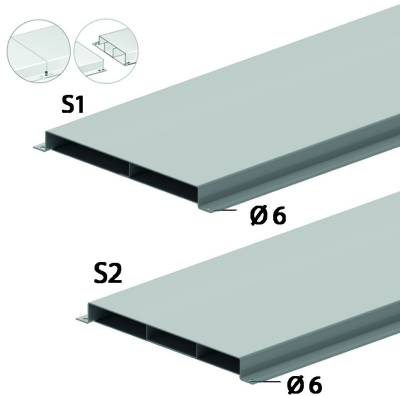

2 oder 3-Zügig.
Stärke Abschlussplatte: 1,00 mm
Stärke Grundstruktur: 1,00 mm

Referenz	 mm	 mm	 mm	 mm	kg/m		Einheit
VGLI28.170S1	28	170		3000	3,976	150	M
VGLI28.170S2	28	170		3000	4,475	150	M
VGLI28.250S1	28	250		3000	5,232	150	M
VGLI28.250S1.2	28	250		2000	5,232	300	M
VGLI28.250S2	28	250		3000	5,935	150	M
VGLI28.250S2.2	28	250		2000	5,935	300	M
VGLI28.350S1	28	350		3000	6,802	150	M
VGLI28.350S1.2	28	350		2000	6,802	300	M
VGLI28.350S2	28	350		3000	7,772	150	M
VGLI28.350S2.2	28	350		2000	7,772	300	M

Geprüft nach EN 50085-2-2.
Insgesamt 16 vorgebohrte Befestigungslöcher je Unterflurkanal.
Für den Potentialausgleich sind keine Zusatzteile erforderlich.
Das Produkt ist patentiert.