


VGLI38  
Unterflurkanal leicht integr. Verbinder

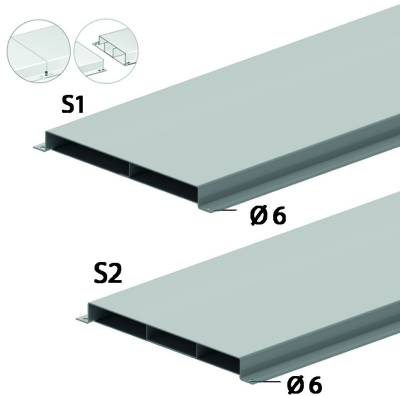

2 oder 3-Zügig.  
Stärke Abschlussplatte: 1,00 mm  
Stärke Grundstruktur: 1,00 mm

| Referenz       |  mm |  mm |  mm |  mm | kg/m  |  | Einheit |
|----------------|--------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------|-------|-------------------------------------------------------------------------------------|---------|
| VGLI38.170S1   | 38                                                                                   | 170                                                                                  |                                                                                        | 3000                                                                                   | 4,211 | 150                                                                                 | M       |
| VGLI38.170S2   | 38                                                                                   | 170                                                                                  |                                                                                        | 3000                                                                                   | 4,789 | 150                                                                                 | M       |
| VGLI38.250S1   | 38                                                                                   | 250                                                                                  |                                                                                        | 3000                                                                                   | 5,467 | 150                                                                                 | M       |
| VGLI38.250S2   | 38                                                                                   | 250                                                                                  |                                                                                        | 3000                                                                                   | 6,249 | 150                                                                                 | M       |
| VGLI38.350S1   | 38                                                                                   | 350                                                                                  |                                                                                        | 3000                                                                                   | 7,037 | 150                                                                                 | M       |
| VGLI38.350S1.2 | 38                                                                                   | 350                                                                                  |                                                                                        | 2000                                                                                   | 7,037 | 300                                                                                 | M       |
| VGLI38.350S2   | 38                                                                                   | 350                                                                                  |                                                                                        | 3000                                                                                   | 8,086 | 150                                                                                 | M       |
| VGLI38.350S2.2 | 38                                                                                   | 350                                                                                  |                                                                                        | 2000                                                                                   | 8,086 | 300                                                                                 | M       |

Geprüft nach EN 50085-2-2.  
Insgesamt 16 vorgebohrte Befestigungslöcher je Unterflurkanal.  
Für den Potentialausgleich sind keine Zusatzteile erforderlich.  
Das Produkt ist patentiert.