



TFCL110S

TFCL mit SIN

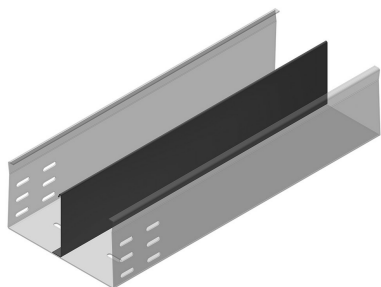

Zu befestigen mit:



Verbinder
V85.200

Standardausführung		Sendzimir verzinkt						
Ausführung Option		Tauchfeuerverzinkt						
Ausführung Option PE		Polyester-Pulverbeschichtung						
HD Referenz	↕ mm	↔ mm	→ ← mm	↔ mm	kg/m	📦 Lager	Einheit	
HD TFCL110.150.200S12	110	150	2	3000	6,840	30	M	
HD TFCL110.150.200S13	110	150	2	3000	6,840	30	M	
HD TFCL110.150.200S23	110	150	2	3000	7,660	30	M	
HD TFCL110.200.200S12	110	200	2	3000	7,640	30	M	
HD TFCL110.200.200S13	110	200	2	3000	7,640	30	M	
HD TFCL110.200.200S23	110	200	2	3000	8,460	30	M	
HD TFCL110.250.200S12	110	250	2	3000	8,440	30	M	
HD TFCL110.250.200S13	110	250	2	3000	8,440	30	M	
HD TFCL110.250.200S23	110	250	2	3000	9,260	30	M	
HD TFCL110.300.200S12	110	300	2	3000	9,240	30	M	
HD TFCL110.300.200S13	110	300	2	3000	9,240	30	M	
HD TFCL110.300.200S23	110	300	2	3000	10,060	30	M	

S12: 1 Trennsteg auf 1/2 eingeschweißt
 S13: 1 Trennsteg auf 1/3 eingeschweißt
 S23: 2 Trennstege auf je 1/3 eingeschweißt