



TFCL60S

TFCL mit SIN

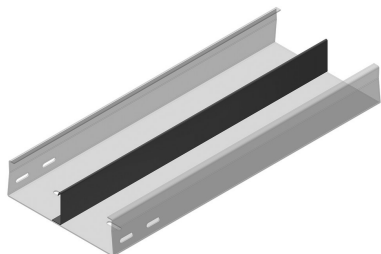

Zu befestigen mit:



Verbinder
V35.200

Standardausführung		Sendzimir verzinkt							
Ausführung Option		Tauchfeuerverzinkt							
Ausführung Option PE		Polyester-Pulverbeschichtung							
HD Referenz	↕ mm	↔ mm	→ ← mm	↔ mm	kg/m	📦	Lager	Einheit	
HD TFCL60.100.200S12	60	100	2	3000	4,161	30		M	
HD TFCL60.100.200S13	60	100	2	3000	4,161	30		M	
HD TFCL60.150.200S12	60	150	2	3000	4,951	30		M	
HD TFCL60.150.200S13	60	150	2	3000	4,951	30		M	
HD TFCL60.150.200S23	60	150	2	3000	5,462	30		M	
HD TFCL60.200.200S12	60	200	2	3000	5,761	30		M	
HD TFCL60.200.200S13	60	200	2	3000	5,761	30		M	
HD TFCL60.200.200S23	60	200	2	3000	6,272	30		M	
HD TFCL60.250.200S12	60	250	2	3000	6,531	30		M	
HD TFCL60.250.200S13	60	250	2	3000	6,531	30		M	
HD TFCL60.250.200S23	60	250	2	3000	7,042	30		M	
HD TFCL60.300.200S12	60	300	2	3000	7,361	30		M	
HD TFCL60.300.200S13	60	300	2	3000	7,361	30		M	
HD TFCL60.300.200S23	60	300	2	3000	7,872	30		M	

S12: 1 Trennsteg auf 1/2 eingeschweißt
 S13: 1 Trennsteg auf 1/3 eingeschweißt
 S23: 2 Trennstege auf je 1/3 eingeschweißt