


I6KLLVSB

Flexible (rising / low) bend for I6KLL

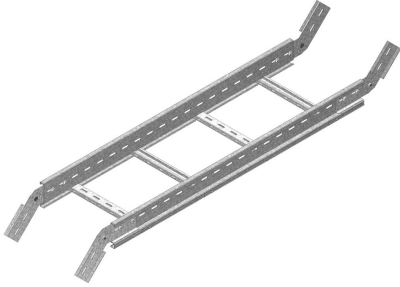

Standard finish


Stainless Steel 316

| HD | Reference | ↕ mm | ↔ mm | → ← mm | ↔ mm | kg/stk | 📦 | Stock | Unit |
|----|-----------------------|---------|---------|------------|---------|--------|---|-------|------|
| - | I6KLLVSB60.150 | 60 | 150 | | 1040 | 2,746 | 1 | | STK |
| - | I6KLLVSB60.200 | 60 | 200 | | 1040 | 2,842 | 1 | | STK |
| - | I6KLLVSB60.300 | 60 | 300 | | 1040 | 3,038 | 1 | | STK |
| - | I6KLLVSB60.400 | 60 | 400 | | 1040 | 3,230 | 1 | | STK |
| - | I6KLLVSB60.500 | 60 | 500 | | 1040 | 3,422 | 1 | | STK |
| - | I6KLLVSB60.600 | 60 | 600 | | 1040 | 3,614 | 1 | | STK |

Minimum number bolts and nuts: 8 pieces.

Fix with:

Pickled and passivated.



Toothed round head bolt / flange nut
I6VM