


HDKS60


Cable ladder DAVID

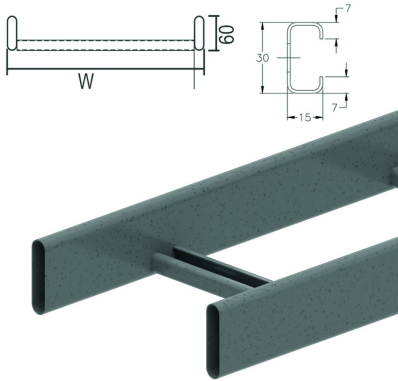

Tubular side walls.
Perforated C-rungs 15x30
Usable inner height: 45 mm
Rung distance: 250 mm

Standard finish Hot-dip galvanised
Optional finish PE Duplex system

| HD | Reference | ↕ mm | ↔ mm | → ← mm | ↔ mm | kg/m | 📦 | Stock | Unit |
|----|-------------------|---------|---------|------------|---------|-------|----|-------|------|
| - | HDKS60.200 | 60 | 200 | | 6000 | 2,800 | 60 | X | M |
| - | HDKS60.300 | 60 | 300 | | 6000 | 3,080 | 60 | X | M |
| - | HDKS60.400 | 60 | 400 | | 6000 | 3,320 | 60 | X | M |
| - | HDKS60.500 | 60 | 500 | | 6000 | 3,530 | 60 | X | M |
| - | HDKS60.600 | 60 | 600 | | 6000 | 3,870 | 60 | X | M |

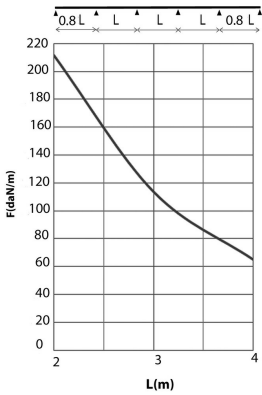

LOAD DIAGRAM

This diagram illustrates the permissible uniformly distributed horizontal loads applied to multiple supports. They comply with IEC 61537 with connection to 1/5 of the span and the end span = 0,8x the span.

F = max. admissible load (daN/m)
L = support distance (m)
Max. deflection (m) = L/100


CHARACTERISTICS

- lightweight
- strong
- rounded tubular side-walls eliminate the risk of cable damage
- hot-dip galvanised as standard
- wrap around joiners with pre-assembled tap bolts ensure a fast secure connection
- rungs are perforated to enable efficient attachment of cables.
- partition (ZMSLOS35) can be fixed to the cable ladder with a sliding nut (GM6) and pan head bolt (HDRB6.10).

TECHNICAL INFORMATION

- Side walls are constructed from tubular section 60 mm x 15 mm.
- C-rungs are fixed at 250 mm intervals.
- Rungs are welded to the side wall of the cable ladder.
- Rungs are alternately placed with openings upwards and downwards.

Fix with:



Joiner for HDKS
HDSSU