


SKL60

Rising cable ladder

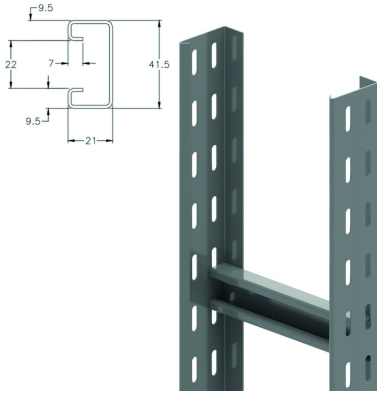


Side walls: perforated L-profile
C-rungs 41x21 mm

Usable inner height: 39 mm
Rung distance: 500 mm
Max. load: 114 kg/rung

Standard finish	Pre-galvanised
Optional finish	Hot-dip galvanised
Optional finish PE	Coating

HD	Reference	↑ mm	↔ mm	→ ← mm	↔ mm	kg/m	📦	Stock	Unit
HD	SKL60.200	60	200		3000	2,430	24		M
HD	SKL60.300	60	300		3000	2,670	24		M
HD	SKL60.400	60	400		3000	2,930	24		M
HD	SKL60.500	60	500		3000	3,070	24		M
HD	SKL60.600	60	600		3000	3,330	24		M

Fix with:



Joiner
V60.200



Toothed round
head bolt / flange
nut
VM