


SKL60

Rising cable ladder

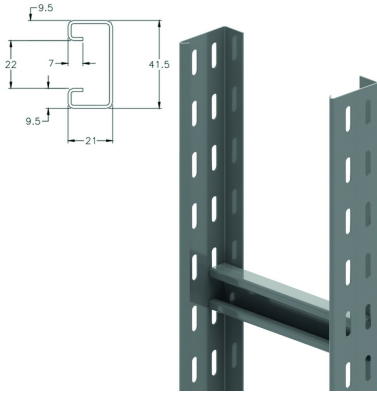


Side walls: perforated L-profile
C-rungs 41x21 mm

Usable inner height: 39 mm
Rung distance: 500 mm
Max. load: 114 kg/rung

| | |
|--------------------|--------------------|
| Standard finish | Pre-galvanised |
| Optional finish | Hot-dip galvanised |
| Optional finish PE | Coating |

| HD | Reference | ↑ mm | ↔ mm | → ← mm | ↔ mm | kg/m | 📦 | Stock | Unit |
|----|------------------|---------|---------|------------|---------|-------|----|-------|------|
| HD | SKL60.200 | 60 | 200 | | 3000 | 2,430 | 24 | | M |
| HD | SKL60.300 | 60 | 300 | | 3000 | 2,670 | 24 | | M |
| HD | SKL60.400 | 60 | 400 | | 3000 | 2,930 | 24 | | M |
| HD | SKL60.500 | 60 | 500 | | 3000 | 3,070 | 24 | | M |
| HD | SKL60.600 | 60 | 600 | | 3000 | 3,330 | 24 | | M |

Fix with:



Joiner
V60.200

Toothed round
head bolt / flange
nut
VM