


KLZ
Cable ladder height 150

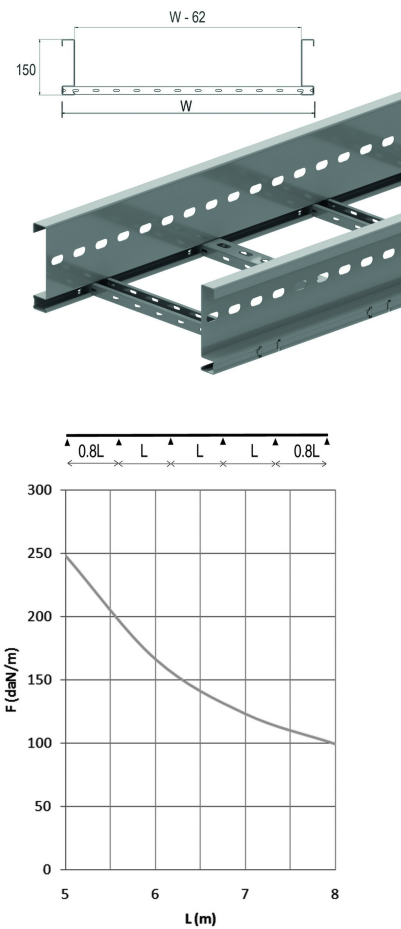



Cable ladder for large support distances up to 8 metres
Perforated C datarungs 41x21

Usable inner height: 127 mm
Rung distance: 300 mm
To order: Length 3000 mm
To order: Width 700 - 1200 mm (increments of 100 mm)

Standard finish	Pre-galvanised
Optional finish	zinc magnesium
Optional finish PE	Coating

HD	Reference	mm	mm	mm	mm	kg/m		Stock	Unit
-	KLZ200	150	218	2	6000	7,520	48		M
-	KLZ300	150	318	2	6000	7,840	48		M
-	KLZ400	150	418	2	6000	8,160	48		M
-	KLZ500	150	518	2	6000	8,480	48		M
-	KLZ600	150	618	2	6000	8,810	48		M
-	KLZ800	150	818	2	6000	9,950	48		M
-	KLZ1000	150	1018	2	6000	10,140	48		M
-	ZMKLZ200	150	218	1,75	6000	7,520	48		M
-	ZMKLZ400	150	418	1,75	6000	8,160	48		M
-	ZMKLZ300	150	318	1,75	6000	7,840	48		M
-	ZMKLZ500	150	518	1,75	6000	8,480	48		M
-	ZMKLZ600	150	618	1,75	6000	8,810	48		M
-	ZMKLZ800	150	818	2	6000	9,950	48		M
-	ZMKLZ1000	150	1018	2	6000	10,140	48		M

Fix with:

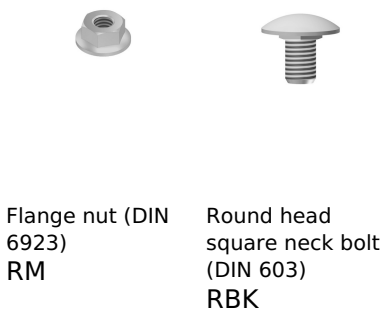

Joiner for KLZ
KLZKP

LOAD DIAGRAM

This diagram illustrates the permissible uniformly distributed horizontal loads applied to multiple supports. They comply with IEC 61537 with connection in the centre of the span and the end span = 0,8x the span.

F = max. admissible load (daN/m)
L = support distance (m)
Max. deflection (m) = L/200

CHARACTERISTICS

- strong
- usable inner height 127 mm, ideal for large diameter cables
- no further coupling holes are required if the cable ladder is cut
- no joiners are required to attach accessories such as bends, tees etc.
- rungs are perforated to enable efficient attachment of cables
- partition (SLOS110) can be fixed to the cable ladder with a sliding nut (PNP06) and pan head bolt (RB6.20).

TECHNICAL INFORMATION

- Side walls are constructed from S profile with a return flange and are continuously perforated
- C-profile rungs are fixed at 300 mm intervals.
 - rungs are mechanically attached to the side wall of the cable ladder.
 - rungs are alternately placed with openings upwards and downwards.