

KLLVS

Reducing plate for KLL



Max. reduction of 300mm


| Reference | Finish | ↕ mm | ↔ mm | → ← mm | ↔ mm | kg/stk | 📦 | Unit |
|-------------------|--------|---------|---------|------------|---------|--------|---|------|
| ZMKLLVS60 | DF | 38 | 13 | 1,50 | | 0,291 | 6 | STK |
| ZMKLLVS110 | DF | 90 | 13 | 1,50 | | 0,773 | 6 | STK |
| KLLVS60 | - | 37 | 13 | | 400 | 0,312 | 6 | STK |
| KLLVS110 | - | 89 | 13 | | 500 | 0,773 | 6 | STK |

Minimum number bolts and nuts VM6.10: 4 pieces.

Legend finish

- DF = Defender

Fix with:

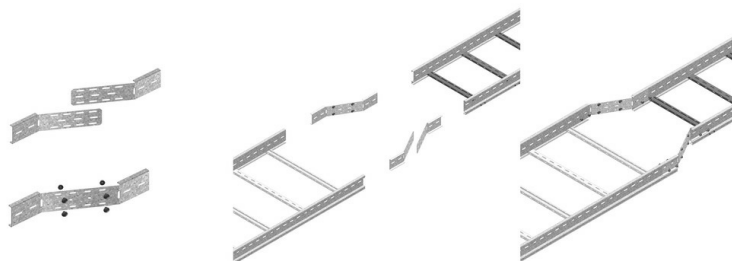

Toothed round head bolt / flange nut
VM