


KBSI35

Cable tray with interlocking ends

Interlocking ends
Alternative perforations
Return flanges

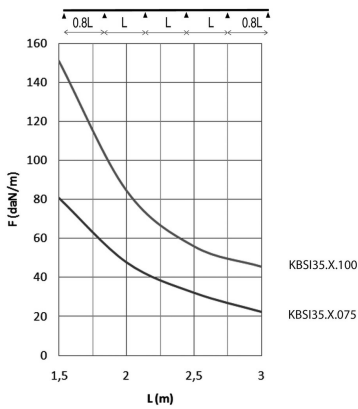

Reference	Finish	mm	mm	mm	mm	kg/m	Unit	Unit
KBSCL35.100.075	SZ	35	100	0,75	3000	0,960	60	M
KBSCL35.075.075	SZ	35	75	0,75	3000	0,790	60	M
KBSCL35.150.075	SZ	35	150	0,75	3000	1,220	60	M
KBSCL35.200.075	SZ	35	200	0,75	3000	1,480	60	M
KBSCL35.300.075	SZ	35	300	0,75	3000	1,990	60	M

LOAD DIAGRAM

This diagram illustrates the permissible uniformly distributed loads applied to multiple supports. They comply with IEC 61537 with connection to 1/5 of the span and the end span = 0,8 x the span.

F = max. admissible load (daN/m)
L = support distance (m)
Max. deflection (m) = L/100

CHARACTERISTICS

Embedded perforations for:

- extra load capacity
- better aeration
- better stability
- better condensation drainage

Alternative perforations for:

- better fixing to supports
- very useful for attaching cables

Earthing.

TECHNICAL INFORMATION

The perforation scheme differs according to the width.


The surface of the interlocking end is rounded in order to protect the cables.

Round holes of Ø 16 mm and Ø 19.5 mm provided as opening for the fitting of a gland.

Legend finish

- SZ = Sendzimir

Fix with:



Toothed round head bolt / flange nut
VM