


# COMEGA290

## Open suspension bracket

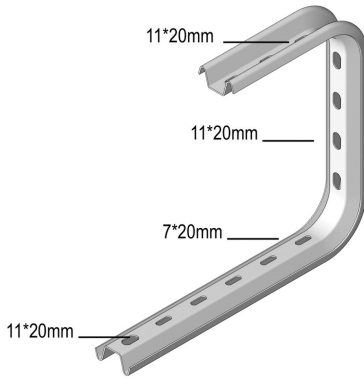

| Reference            | Finish | ↑<br>mm | ↔<br>mm | →  ←<br>mm | ↔<br>mm | kg/stk | 📦  | Unit |
|----------------------|--------|---------|---------|------------|---------|--------|----|------|
| <b>COMEGA290.150</b> | SZ     | 290     | 195     |            |         | 0,560  | 12 | STK  |
| <b>COMEGA290.200</b> | SZ     | 290     | 245     |            |         | 0,620  | 12 | STK  |
| <b>COMEGA290.250</b> | SZ     | 290     | 295     |            |         | 0,760  | 6  | STK  |
| <b>COMEGA290.300</b> | SZ     | 290     | 345     |            |         | 0,820  | 6  | STK  |
| <b>COMEGA290.400</b> | SZ     | 290     | 445     |            |         | 0,930  | 6  | STK  |

To order per full packaging.  
Ends held up by threaded rod TIM10.  
Use the VOMEGA to avoid compression of the profile.  
When ordering, add 100 mm to the width. E.g. KBS 300 mm: use COMEGA290.400.

**Legend finish**  
- SZ = Sendzimir