


HDWK


Welded bracket

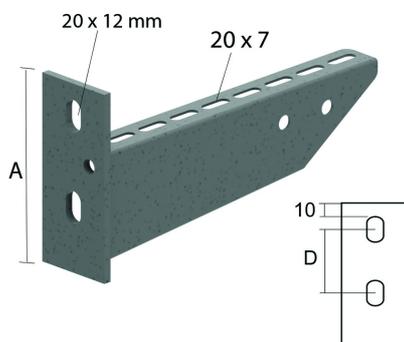

	Max. load (in daN)	A	D
HDWK100	120	106,5	46,5
HDWK150	230	112	52
HDWK200	340	116	56
HDWK300	320	125	65
HDWK400	430	134	74

Reference	↕ mm	↔ mm	→ ← mm	↔ mm	kg/stk	📦	Unit
HDWK100	106	117			0,300	12	STK
HDWK150	112	167			0,360	12	STK
HDWK200	116	217			0,430	12	STK
HDWK300	125	317			0,730	12	STK
HDWK400	134	417			0,880	6	STK

Fix with:



Bolt (DIN 933)
B

Nut (DIN 934)
M



Flat giant washer
(DIN 9021)
CRO

For symmetrical mounting, use HDB12.50 + HDCRO12 + HDM12.

