
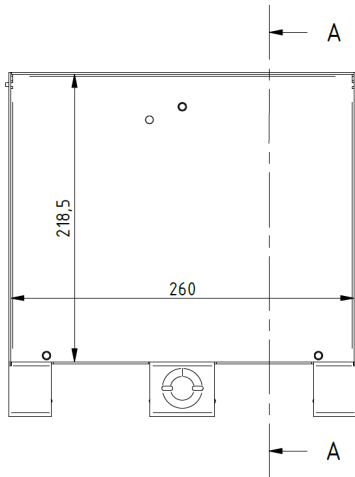


# KDVIRK13

## Hinged cover square, with border

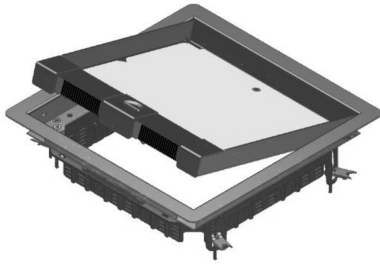

Build-in frame with border + tileframe + stainless steel cable outlet

Max. load: 2000 N (small surface area)

Max. load: 3000 N (large surface area)

Active condition: IP 20

Non-active condition: IP 30

Depth of floor covering: Max. 26 mm

| Reference       | ↕<br>mm | ↔<br>mm | →  ←<br>mm | ↔↔<br>mm | kg/stk |   | Unit |
|-----------------|---------|---------|------------|----------|--------|---|------|
| <b>KDVIRK13</b> |         | 267     |            | 267      | 2,479  | 1 | STK  |

Tested to EN 50085-2-2.

Hinged cover for 3 compartments.

Depth of floor covering can be reduced by fitting packers OHEV3.2 and/or OHEV3.5

Can be fixed through included universal clamps in screed floor.

Hinged cover is provided with 2 cable outlets with integrated push lever and 2 cable organisers.

Hinged cover is provided with an earthing strip between cover and frame.

A reinforcement kit KDVIZ3 and NEOT3 are necessary to support heavy loads.

For use in dry floors only.