


# TFCL110

## Industrial floor trunking

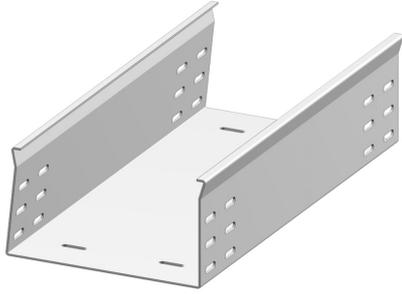


Non-perforated base  
Return flanges

Reference	↑ mm	↔ mm	→  ← mm	↔ mm	kg/m	📦	Unit
<b>TFCL110.150.200</b>	110	150	2	3000	6,020	30	M
<b>TFCL110.200.200</b>	110	200	2	3000	6,820	30	M
<b>TFCL110.250.200</b>	110	250	2	3000	7,620	30	M
<b>TFCL110.300.200</b>	110	300	2	3000	8,420	30	M

Application area: The industrial floor trunking is being used in surroundings where robots need to have a permanent freedom of movement and where people need to be allowed to walk on the cable trays. For example, at production lines in the automotive industry.

**Fix with:**



Joining plate  
V85.200