


# TFCL60

## Industrial floor trunking

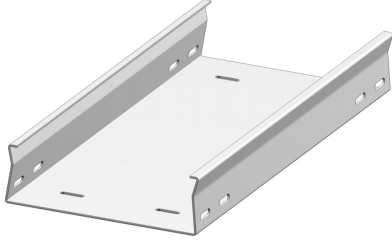


Non-perforated base  
Return flanges

Reference	↕ mm	↔ mm	→  ← mm	↔ mm	kg/m	📦	Unit
<b>TFCL60.100.200</b>	60	100	2	3000	3,650	30	M
<b>TFCL60.150.200</b>	60	150	2	3000	4,440	30	M
<b>TFCL60.200.200</b>	60	200	2	3000	5,250	30	M
<b>TFCL60.250.200</b>	60	250	2	3000	6,020	30	M
<b>TFCL60.300.200</b>	60	300	2	3000	6,850	30	M

Application area: Industrial floor trunking is being used in surroundings where robots need to have a permanent freedom of movement and where people need to be allowed to walk on the cable trays. For example, at production lines in the automotive industry.

### Fix with:



Joining plate  
V35.200