


# COMEGACLU170

## Open suspension bracket universal

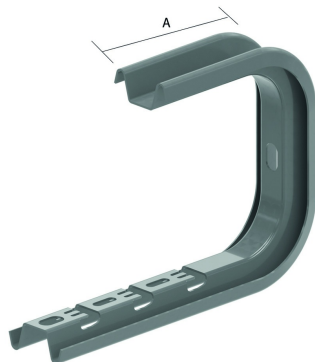

Useful for direct mounting to the ceiling or with threaded rod TIM8 or TIM10.

Standard finish	Pre-galvanised
Optional finish	Hot-dip galvanised
Optional finish PE	Coating

	Max. load (in daN)	A
COMEGACLU170.150	60	145
COMEGACLU170.200	60	145
COMEGACLU170.300	50	195
COMEGACLU170.400	40	245

HD Reference	↕ mm	↔ mm	→  ← mm	↔ mm	kg/stk	📦	Stock	Unit
HD <b>COMEGACLU170.150</b>	175	194			0,460	12	X	STK
HD <b>COMEGACLU170.200</b>	175	244			0,540	12	X	STK
HD <b>COMEGACLU170.300</b>	175	344			0,700	6	X	STK
HD <b>COMEGACLU170.400</b>	175	444			0,860	6	X	STK

To order per full packaging.

Fixing of the cable tray by VM6.20.

Use the VOMEGA to avoid compression of the profile.

Max. load (in daN): uniformly distributed over complete width of cantilever brackets.

Do not use with: VFUL30.065, VFUL35.150, VFU35.150, VFUL 60.050