


OBZ180

Open suspension bracket

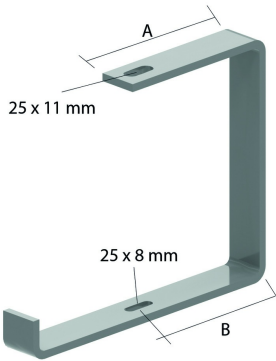

Useful for direct mounting to the ceiling or with threaded rod TIM8 or TIM10.

Standard finish	Electro zinc-plated
Optional finish	Hot-dip galvanised
Optional finish PE	Coating

Article	Max. load (in daN)	A	B
OBZ180.075	50	64	42,5
OBZ180.100	30	80	59,5
OBZ180.150	30	105	84,5
OBZ180.200	30	130	109,5
OBZ180.250	40	155	134,5
OBZ180.300	40	180	159,5
OBZ180.400	20	230	209,5

HD	Reference	↕ mm	↔ mm	→ ← mm	↔↔ mm	kg/stk	📦	Stock	Unit
HD	OBZ180.075	182	102			0,460	12	X	STK
HD	OBZ180.100	182	125			0,510	12	X	STK
HD	OBZ180.150	182	177			0,630	12	X	STK
HD	OBZ180.200	182	227			0,720	12	X	STK
HD	OBZ180.250	182	281			1,100	6	X	STK
HD	OBZ180.300	182	331			1,270	6	X	STK
HD	OBZ180.400	182	431			1,500	6	X	STK

To order per full packaging.

Fixing of the cable tray by VM6.20.

Max. load (in daN): uniformly distributed over complete width of cantilever brackets.