


# OBZ180

## Open suspension bracket

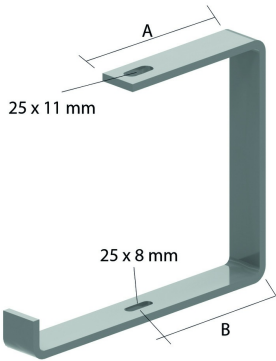

Useful for direct mounting to the ceiling or with threaded rod TIM8 or TIM10.

Standard finish	Electro zinc-plated
Optional finish	Hot-dip galvanised
Optional finish PE	Coating

Article	Max. load (in daN)	A	B
OBZ180.075	50	64	42,5
OBZ180.100	30	80	59,5
OBZ180.150	30	105	84,5
OBZ180.200	30	130	109,5
OBZ180.250	40	155	134,5
OBZ180.300	40	180	159,5
OBZ180.400	20	230	209,5

HD	Reference	↕ mm	↔ mm	→  ← mm	↔↔ mm	kg/stk	📦	Stock	Unit
HD	<b>OBZ180.075</b>	182	102			0,460	12	X	STK
HD	<b>OBZ180.100</b>	182	125			0,510	12	X	STK
HD	<b>OBZ180.150</b>	182	177			0,630	12	X	STK
HD	<b>OBZ180.200</b>	182	227			0,720	12	X	STK
HD	<b>OBZ180.250</b>	182	281			1,100	6	X	STK
HD	<b>OBZ180.300</b>	182	331			1,270	6	X	STK
HD	<b>OBZ180.400</b>	182	431			1,500	6	X	STK

To order per full packaging.

Fixing of the cable tray by VM6.20.

Max. load (in daN): uniformly distributed over complete width of cantilever brackets.