


OBZ130

Open suspension bracket

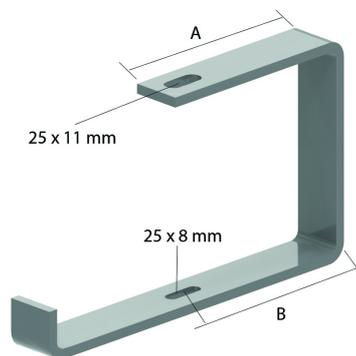

Useful for direct mounting to the ceiling or with threaded rod TIM8 or TIM10.

| Article | Max. load (in daN) | A | B |
|------------|--------------------|-----|-------|
| OBZ130.075 | 80 | 64 | 42,5 |
| OBZ130.100 | 40 | 80 | 59,5 |
| OBZ130.150 | 50 | 105 | 84,5 |
| OBZ130.200 | 30 | 130 | 109,5 |
| OBZ130.250 | 50 | 155 | 134,5 |
| OBZ130.300 | 40 | 180 | 159,5 |
| OBZ130.400 | 30 | 230 | 209,5 |

| Reference | ↕ mm | ↔ mm | → ← mm | ↔ mm | kg/stk | 📦 | Unit |
|-------------------|---------|---------|------------|---------|--------|----|------|
| OBZ130.075 | 132 | 102 | | | 0,390 | 12 | STK |
| OBZ130.100 | 132 | 125 | | | 0,450 | 12 | STK |
| OBZ130.150 | 132 | 177 | | | 0,570 | 12 | STK |
| OBZ130.200 | 132 | 227 | | | 0,670 | 12 | STK |
| OBZ130.250 | 132 | 281 | | | 1,020 | 6 | STK |
| OBZ130.300 | 132 | 331 | | | 1,180 | 6 | STK |
| OBZ130.400 | 132 | 431 | | | 1,461 | 6 | STK |

Fixing of the cable tray by VM6.20.

Max. load (in daN): uniformly distributed over complete width of cantilever brackets.