


# I6KLLVS

## Reducing plate for I6KLL

Max. reduction of 300mm





| Reference        | ↕<br>mm | ↔<br>mm | →  ←<br>mm | ↔<br>mm | kg/stk | 📦 | Unit |
|------------------|---------|---------|------------|---------|--------|---|------|
| <b>I6KLLVS60</b> | 37      | 13      |            | 400     | 0,260  | 1 | STK  |

Minimum number bolts and nuts: 4 pieces.

Pickled and passivated.

### Fix with:

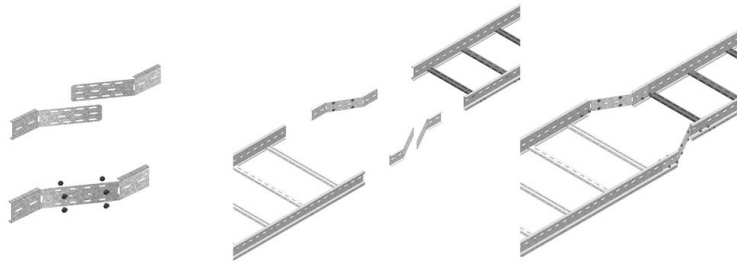

Toothed round head bolt / flange nut  
I6VM