


# I6KLLVS

## Reducing plate for I6KLL

Max. reduction of 300mm





Reference	↕ mm	↔ mm	→  ← mm	↔ mm	kg/stk	📦	Unit
<b>I6KLLVS60</b>	37	13		400	0,260	1	STK

Minimum number bolts and nuts: 4 pieces.

Pickled and passivated.

### Fix with:

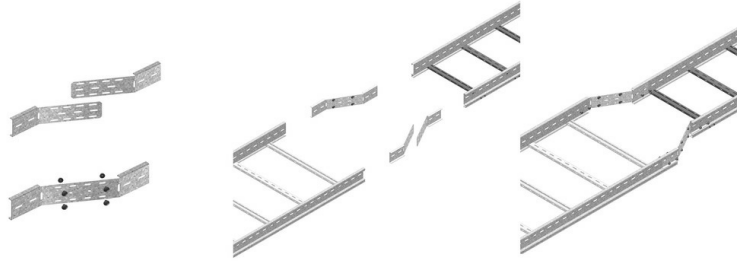

Toothed round head bolt / flange nut  
I6VM