


I6KLLVSB

Flexible (rising / low) bend for I6KLL

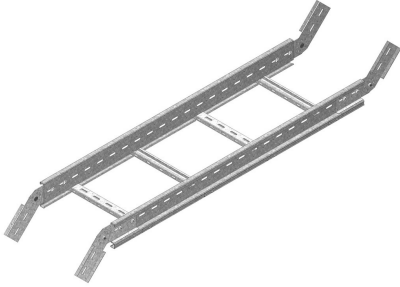


Reference	↕ mm	↔ mm	→ ← mm	↔ mm	kg/stk	📦	Unit
I6KLLVSB60.150	60	150		1040	2,746	1	STK
I6KLLVSB60.200	60	200		1040	2,842	1	STK
I6KLLVSB60.300	60	300		1040	3,038	1	STK
I6KLLVSB60.400	60	400		1040	3,230	1	STK
I6KLLVSB60.500	60	500		1040	3,422	1	STK
I6KLLVSB60.600	60	600		1040	3,614	1	STK

Minimum number bolts and nuts: 8 pieces.

Pickled and passivated.

Fix with:



Toothed round head bolt / flange nut
I6VM