


# I6KLM125

## Cable ladder height 125

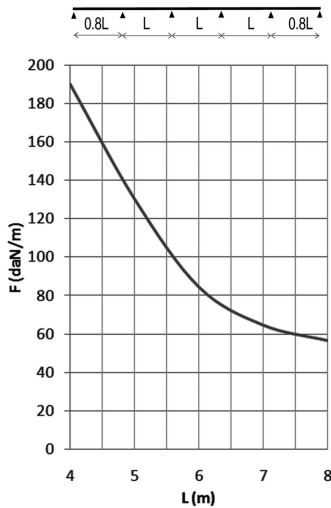

Cable ladder for large support distances up to 8 metres  
Perforated C rungs 41 x 21

Usable inner height: 102 mm  
Rung distance: 250 mm  
To order: Length 3000 mm  
To order: Width 700 - 1200 mm (increments of 100 mm)

Reference	↑ mm	↔ mm	→  ← mm	↔ mm	kg/m	📦	Unit
<b>I6KLM125.150</b>	125	150		6000	5,723	6	M
<b>I6KLM125.200</b>	125	218	1,5	6000	5,851	60	M
<b>I6KLM125.300</b>	125	318	1,5	6000	6,111	60	M
<b>I6KLM125.400</b>	125	418	1,5	6000	6,363	60	M
<b>I6KLM125.450</b>	125	450		6000	6,491	6	M
<b>I6KLM125.500</b>	125	518	1,5	6000	6,619	60	M
<b>I6KLM125.600</b>	125	618	1,5	6000	6,875	60	M
<b>I6KLM125.750</b>	125	750		6000	7,259	6	M
<b>I6KLM125.800</b>	125	800		6000	7,387	6	M
<b>I6KLM125.900</b>	125	900		6000	7,644	6	M
<b>I6KLM125.1000</b>	125	1000		6000	7,900	6	M

### Fix with:

### LOAD DIAGRAM

This diagram illustrates the permissible uniformly distributed horizontal loads applied to multiple supports. They comply with IEC 61537 with connection in the centre of the span and the end span = 0,8x the span.

F = max. admissible load (daN/m)  
L = support distance (m)  
Max. deflection (m) = L/200


### CHARACTERISTICS

- strong
- usable inner height 102 mm, ideal for large diameter cables
- no further coupling holes are required if the cable ladder is cut
- no joiners are required to attach accessories such as bends, tees etc.
- rungs are perforated to enable efficient attachment of cables
- partition (I6SLOS85) can be fixed to the cable ladder with a sliding nut (I6PNP06) and pan head bolt (I6RB6.20).

### TECHNICAL INFORMATION

- Side walls are constructed from S profile with a return flange and are continuously perforated
- C-profile rungs are fixed at 250 mm intervals.
  - rungs are mechanically attached to the side wall of the cable ladder.
  - rungs are alternately placed with openings upwards and downwards.

Pickled and passivated.



Joiner for  
I6KLM125  
I6KLM125KP




Round head  
square neck bolt  
(DIN 603)  
I6RBK



Nut (DIN 934)  
I6M



Giant washer  
(DIN 125-1 A)  
I6RO



Joiner for  
I6KLM100  
I6KLM100KP