


# COMEGACLU170

## Open suspension bracket universal

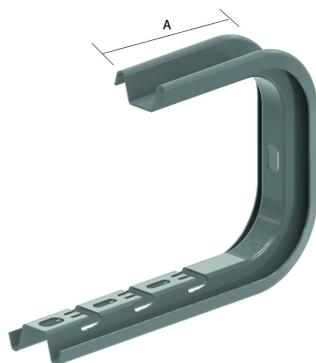

Useful for direct mounting to the ceiling or with threaded rod TIM8 or TIM10.

|                  | Max. load (in daN) | A   |
|------------------|--------------------|-----|
| COMEGACLU170.150 | 60                 | 145 |
| COMEGACLU170.200 | 60                 | 145 |
| COMEGACLU170.300 | 50                 | 195 |
| COMEGACLU170.400 | 40                 | 245 |

| Reference                 | Finish | ↑<br>mm | ↔<br>mm | →  ←<br>mm | ↔<br>mm | kg/stk | 📦  | Unit |
|---------------------------|--------|---------|---------|------------|---------|--------|----|------|
| <b>ZMCOMEGACLU170.150</b> | DF     | 170     | 182     | 1,5        |         | 0,460  | 12 | STK  |
| <b>ZMCOMEGACLU170.200</b> | DF     | 170     | 232     | 1,5        |         | 0,540  | 12 | STK  |
| <b>ZMCOMEGACLU170.300</b> | DF     | 170     | 332     | 1,5        |         | 0,700  | 6  | STK  |
| <b>ZMCOMEGACLU170.400</b> | DF     | 170     | 432     | 1,5        |         | 0,860  | 6  | STK  |

Fixing of the cable tray by VM6.20.  
Use the VOMEGA to avoid compression of the profile.  
Max. load (in daN): uniformly distributed over complete width of cantilever brackets.

Do not use with: VFUL30.065, VFUL35.150, VFU35.150, VFUL 60.050

**Legend finish**  
- DF = Defender