

KBS35  
Perforated cable tray

Alternative perforation  
Return flanges


Reference	<div>↑ mm</div>	<div>↔ mm</div>	<div>→  ← mm</div>	<div>↔ mm</div>	kg/m	<div></div>	Unit
KBS35.050.075	35	50	0,75	3000	0,680	150	M



LOAD DIAGRAM

This diagram illustrates the permissible uniformly distributed loads applied to multiple supports. They comply with IEC 61537 with connection in the centre of the span and the end span = 0,8 x the span.

F = max. admissible load (daN/m)  
L = support distance (m)  
Max. deflection (m) = L/100

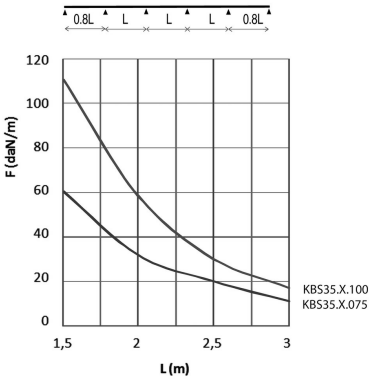

CHARACTERISTICS

Embedded perforations for:

- extra load capacity
- better aeration
- better stability
- better condensation drainage

Alternative perforations for:

- better fixing to supports
- very useful for attaching cables

TECHNICAL INFORMATION

KBS35.050.075: no knock-out facility (pre-shaped holes).

Fix with:



Joiner for fast  
mounting  
V35



Joiner  
V35.200



Toothed round  
head bolt / flange  
nut  
VM