


KBS60

Perforated cable tray

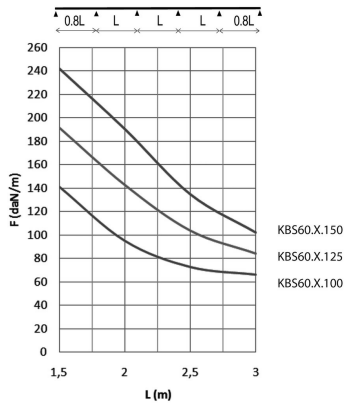

Alternative perforation
Return flanges

Standard finish	Pre-galvanised
Optional finish	Hot-dip galvanised
Optional finish PE	Coating

HD Reference	↑ mm	↔ mm	→ ← mm	↔ mm	kg/m	📦	Stock	Unit
HD KBS60.100.150	60	100	1,5	3000	2,350	60	X	M
HD KBS60.150.150	60	150	1,5	3000	2,830	30	X	M
HD KBS60.200.150	60	200	1,5	3000	3,320	30	X	M
HD KBS60.300.150	60	300	1,5	3000	4,300	30	X	M
HD KBS60.400.150	60	400	1,5	3000	5,280	30	X	M
HD KBS60.500.150	60	500	1,5	3000	6,250	30	X	M
HD KBS60.600.150	60	600	1,5	3000	7,230	30	X	M

LOAD DIAGRAM

This diagram illustrates the permissible uniformly distributed loads applied to multiple supports. They comply with IEC 61537 with connection in the centre of the span and the end span = 0,8 x the span. For widths of 300 and up, it is advised to use a stiffening plate.

F = max. admissible load (daN/m)
L = support distance (m)
Max. deflection (m) = L/100

Fix with:



Joiner for fast mounting
V60

Joiner
V60.200



Toothed round head bolt / flange nut
VM

Round holes of Ø 16 mm and Ø 19.5 mm provided as opening for the fitting of a gland.

KBS60.050.075 and KBS60.050.100: No knock-out facility (pre-shaped holes).