

# KBSCL60.2

## Cable Tray Clickable




Clicking ends  
Alternative perforations  
Return flanges

Reference	↑ mm	↔ mm	→  ← mm	↔ mm	kg/m	📦	Unit
<b>KBSCL60.100.75.2</b>	60	100	0,75	1950	1,200	540	M
<b>KBSCL60.200.75.2</b>	60	200	0,75	1950	1,723	300	M
<b>KBSCL60.300.75.2</b>	60	300	0,75	1950	2,234	204	M
<b>KBSCL60.400.10.2</b>	60	400	1	1950	3,545	152	M

### LOAD DIAGRAM

This diagram illustrates the permissible uniformly distributed loads applied to multiple supports. They comply with IEC 61537 with connection in the centre of the span and the end span = 0,8 x the span.

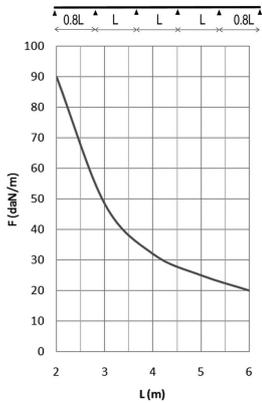

F = max. admissible load (daN/m)  
L = support distance (m)  
Max. deflection (m) = L/100

### FEATURES

- Clickable.
- The simplest jointing system, with a single movement.
- Rapid - Just click and ready for the next joint. Immediate alignment at the same time.
- Strong - As strong as a bolted joint.
- Reliable - Maximum load with snap-fit joint. Multiple jointing options available.
- Cost-effective - Working faster results in immediate time and cost savings.
- High standard - Wide and complete range of accessories available.

Etched perforations for:

- better stability
- extra load-bearing capacity
- better cooling

Longitudinal and transverse perforations for:

- better fixing to the support
- convenient cable bundling

Additional equipotential bonding available by 1. snap-fit joint, 2. bolted joint, 3. push-through lip in the bottom.