


KG110

Cable tray not perforated

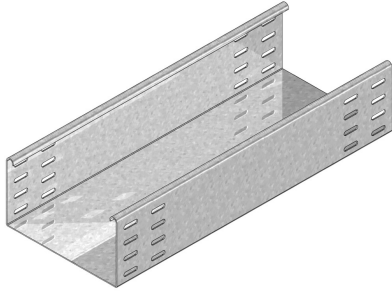

Not perforated
Return flanges

To order: Height 85 mm

Standard finish

Pre-galvanised


Optional finish

Hot-dip galvanised

Optional finish PE

Coating

HD Reference	↑ mm	↔ mm	→ ← mm	↔ mm	kg/m	📦	Stock	Unit
HD KG110.100.150	110	100	1,5	3000	4,000	18	X	M
HD KG110.150.150	110	150	1,5	3000	4,590	18	X	M
HD KG110.200.150	110	200	1,5	3000	5,180	18	X	M
HD KG110.300.150	110	300	1,5	3000	6,360	18	X	M
HD KG110.400.150	110	400	1,5	3000	7,540	18	X	M
HD KG110.500.150	110	500	1,5	3000	8,710	18	X	M
HD KG110.600.150	110	600	1,5	3000	9,890	18	X	M

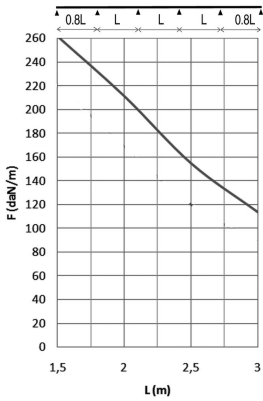

LOAD DIAGRAM


This diagram illustrates the permissible uniformly distributed loads applied to multiple supports. They comply with IEC 61537 with connection in the centre of the span and the end span = 0,8 x the span.

F = max. admissible load (daN/m)

L = support distance (m)

Max. deflection (m) = L/100

Fix with:



Joiner
V110.200



Toothed round
head bolt / flange
nut
VM

For widths > 400 in combination with a cover: Please state explicitly in the order.