


TFCL110

Industrial floor trunking

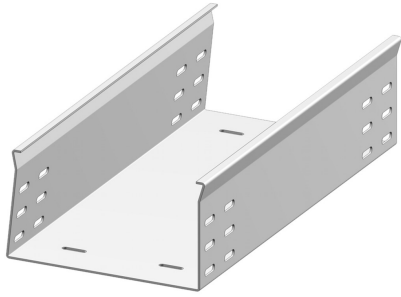


Non-perforated base
Return flanges

Standard finish	Pre-galvanised
Optional finish	Hot-dip galvanised
Optional finish PE	Coating

HD Reference	↕ mm	↔ mm	→ ← mm	↔ mm	kg/m	📦	Stock	Unit
HD TFCL110.150.200	110	150	2	3000	6,020	30		M
HD TFCL110.200.200	110	200	2	3000	6,820	30		M
HD TFCL110.250.200	110	250	2	3000	7,620	30		M
HD TFCL110.300.200	110	300	2	3000	8,420	30		M

Fix with:



Joining plate
V85.200

Application area: The industrial floor trunking is being used in surroundings where robots need to have a permanent freedom of movement and where people need to be allowed to walk on the cable trays. For example, at production lines in the automotive industry.