


TFCL60

Industrial floor trunking

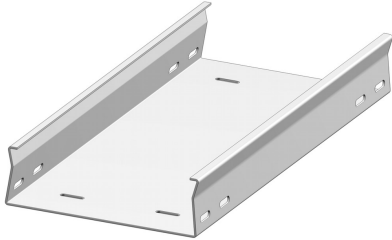


Non-perforated base
Return flanges

Standard finish	Pre-galvanised
Optional finish	Hot-dip galvanised
Optional finish PE	Coating

HD Reference	↕ mm	↔ mm	→ ← mm	↔ mm	kg/m	📦	Stock	Unit
HD TFCL60.100.200	60	100	2	3000	3,650	30		M
HD TFCL60.150.200	60	150	2	3000	4,440	30		M
HD TFCL60.200.200	60	200	2	3000	5,250	30		M
HD TFCL60.250.200	60	250	2	3000	6,020	30		M
HD TFCL60.300.200	60	300	2	3000	6,850	30		M

Fix with:



Joining plate
V35.200

Application area: Industrial floor trunking is being used in surroundings where robots need to have a permanent freedom of movement and where people need to be allowed to walk on the cable trays. For example, at production lines in the automotive industry.