


# TFCL85

## Industrial floor trunking

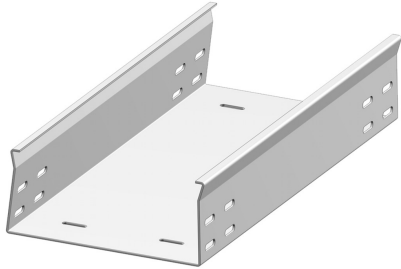


Non-perforated base  
Return flanges

Standard finish	Pre-galvanised
Optional finish	Hot-dip galvanised
Optional finish PE	Coating

HD Reference	↕ mm	↔ mm	→  ← mm	↔ mm	kg/m	📦	Stock	Unit
HD <b>TFCL85.100.200</b>	85	100	2	3000	4,430	30		M
HD <b>TFCL85.150.200</b>	85	150	2	3000	5,230	30		M
HD <b>TFCL85.200.200</b>	85	200	2	3000	6,030	30		M
HD <b>TFCL85.250.200</b>	85	250	2	3000	6,830	30		M
HD <b>TFCL85.300.200</b>	85	300	2	3000	7,630	30		M

**Fix with:**



Joining plate  
V60.200

Application area: Industrial floor trunking is being used in surroundings where robots need to have a permanent freedom of movement and where people need to be allowed to walk on the cable trays. For example, at production lines in the automotive industry.