


# B90

## Courbe horizontale à 90°

Emboîtables avec le chemin de câbles

Rayon: 100 mm

Sur demande: hauteur 35 mm - 85 mm - 110 mm (seulement en SZ et HD)

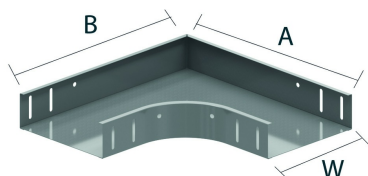


	50	75	100	150	200	300	400	500	600
A	255	280	305	355	405	505	605	705	805
B	255	280	305	355	405	505	605	705	805

### A fixer avec:



Boulon et écrou  
autobloquant  
VM



Écrou  
autobloquant et  
boulon à collet  
VMK

Référence	Finition	↑ mm	↔ mm	→  ← mm	↔ mm	kg/stk	📦	Unité
<b>ZMB90.110.100</b>	DF	110	100	0,75		0,958	1	STK
<b>ZMB90.110.150</b>	DF	110	150	0,75		1,211	1	STK
<b>ZMB90.110.200</b>	DF	110	200	0,75		1,490	1	STK
<b>ZMB90.110.300</b>	DF	110	300	0,75		2,132	1	STK
<b>ZMB90.110.400</b>	DF	110	400	0,75		2,884	1	STK
<b>ZMB90.110.500</b>	DF	110	500	0,75/0,9		4,461	1	STK
<b>ZMB90.110.600</b>	DF	110	600	0,75/0,9		5,669	1	STK
<b>ZMB90.85.100</b>	DF	85	100	0,75		0,833	1	STK
<b>ZMB90.85.150</b>	DF	85	150	0,75		1,072	1	STK
<b>ZMB90.85.200</b>	DF	85	200	0,75		1,338	1	STK
<b>ZMB90.85.300</b>	DF	85	300	0,75		1,952	1	STK
<b>ZMB90.85.400</b>	DF	85	400	0,75		2,677	1	STK
<b>ZMB90.85.500</b>	DF	85	500	0,75/0,9		4,226	1	STK
<b>ZMB90.85.600</b>	DF	85	600	0,75/0,9		5,407	1	STK
<b>ZMB90.60.050</b>	DF	85	600			0,514	1	STK
<b>ZMB90.60.075</b>	DF	85	500			0,609	1	STK
<b>ZMB90.60.100</b>	DF	60	100			0,712	1	STK
<b>ZMB90.60.150</b>	DF	60	150			0,937	1	STK
<b>ZMB90.60.200</b>	DF	60	200			1,189	1	STK
<b>ZMB90.60.300</b>	DF	60	300			1,777	1	STK
<b>ZMB90.60.400</b>	DF	60	400			2,475	1	STK
<b>ZMB90.60.500</b>	DF	60	500			3,997	1	STK
<b>ZMB90.60.600</b>	DF	60	600			5,151	1	STK

Nombre minimal des boulons et des écrous: 8 pièces.

### Légende de la finition

- DF = Defender

