



## VSB

### Coude montant/descendant gaine de sol

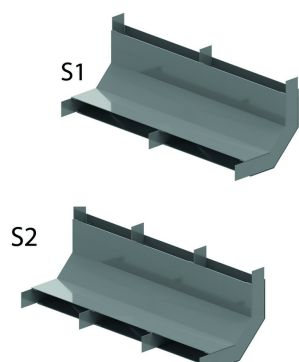

A 2 ou 3 compartiments.

Référence	↑ mm	↔ mm	→  ← mm	↔ mm	kg/stk		Unité
<b>VSB28.170S1</b>	28	170			0,600	1	STK
<b>VSB28.170S2</b>	28	170			0,650	1	STK
<b>VSB28.250S1</b>	28	250			0,750	1	STK
<b>VSB28.250S2</b>	28	250			0,800	1	STK
<b>VSB28.350S1</b>	28	350			1,000	1	STK
<b>VSB28.350S2</b>	28	350			1,050	1	STK
<b>VSB38.170S1</b>	38	170			0,600	1	STK
<b>VSB38.170S2</b>	38	170			0,650	1	STK
<b>VSB38.250S1</b>	38	250			0,800	1	STK
<b>VSB38.250S2</b>	38	250			0,850	1	STK
<b>VSB38.350S1</b>	38	350			1,000	1	STK
<b>VSB38.350S2</b>	38	350			1,100	1	STK
<b>VSB48.170S1</b>	48	170			0,600	1	STK
<b>VSB48.170S2</b>	48	170			0,700	1	STK
<b>VSB48.250S1</b>	48	250			0,750	1	STK
<b>VSB48.250S2</b>	48	250			0,850	1	STK
<b>VSB48.350S1</b>	48	350			1,050	1	STK
<b>VSB48.350S2</b>	48	350			1,150	1	STK

Testé selon la norme EN 50085-2-2.

Pour le raccordement de la gaine de sol noyé à la gaine montante.  
Aussi utilisable comme pièce descendante.