


B90

Courbe horizontale à 90°

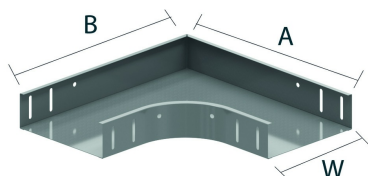

Emboîtables avec le chemin de câbles

Rayon: 100 mm

Sur demande: hauteur 35 mm - 85 mm - 110 mm

Exec. Std.

Sendzimir

Mat. Opt.

Mat. Opt. PE


Revêtement en poudre

	50	75	100	150	200	300	400	500	600
A	255	280	305	355	405	505	605	705	805
B	255	280	305	355	405	505	605	705	805

A fixer avec:



Boulon et écrou
autobloquant
VM



Écrou
autobloquant et
boulon à collet
VMK

HD	Référence	↕ mm	↔ mm	→ ← mm	↔↔ mm	kg/stk	📦	Magasin	Unité
-	B90.60.050	60	50			0,474	1	X	STK
-	B90.60.075	60	75			0,516	1	X	STK
-	B90.60.100	60	100			0,738	1	X	STK
-	B90.60.150	60	150			0,822	1	X	STK
-	B90.60.200	60	200			1,374	1	X	STK
-	B90.60.300	60	300			2,292	1	X	STK
-	B90.60.400	60	400			2,958	1	X	STK
-	B90.60.500	60	500			5,424	1	X	STK
-	B90.60.600	60	600			6,690	1	X	STK
-	ZMB90.60.050	85	600			0,88	1		STK
-	ZMB90.60.075	85	500			0,935	1		STK
-	ZMB90.60.100	60	100			1,188	1	X	STK
-	ZMB90.60.150	60	150			1,628	1	X	STK
-	ZMB90.60.200	60	200			1,925	1	X	STK
-	ZMB90.60.300	60	300			2,97	1	X	STK
-	ZMB90.60.400	60	400			3,74	1	X	STK
-	ZMB90.60.500	60	500			6,49	1	X	STK
-	ZMB90.60.600	60	600			7,92	1	X	STK

Nombre minimal des boulons et des écrous: 8 pièces.

