


# SLOS

## Cloison de séparation séparée

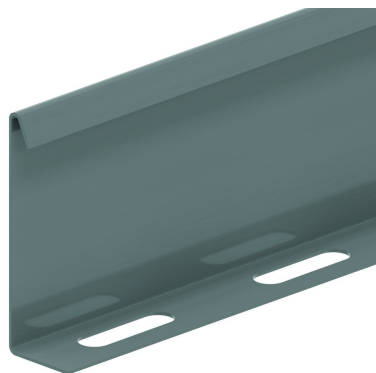

Exec. Std. Sendzimir

Mat. Opt.


Mat. Opt. PE Revêtement en poudre

| HD | Référence        | ↑<br>mm | ↔<br>mm | →  ←<br>mm | ↔<br>mm | kg/m  | 📦   | Magasin | Unité |
|----|------------------|---------|---------|------------|---------|-------|-----|---------|-------|
| -  | <b>SLOS35</b>    | 28      |         |            | 3000    | 0,330 | 150 | X       | M     |
| -  | <b>SLOS60</b>    | 53      |         |            | 3000    | 0,511 | 120 | X       | M     |
| -  | <b>SLOS85</b>    | 78      |         |            | 3000    | 0,680 | 60  | X       | M     |
| -  | <b>SLOS110</b>   | 103     |         |            | 3000    | 0,820 | 30  | X       | M     |
| -  | <b>ZMSLOS35</b>  | 28      |         |            | 3000    | 0,257 | 150 | X       | M     |
| -  | <b>ZMSLOS60</b>  | 60      |         |            | 3000    | 0,397 | 120 | X       | M     |
| -  | <b>ZMSLOS85</b>  | 78      |         |            | 3000    | 0,529 | 60  |         | M     |
| -  | <b>ZMSLOS110</b> | 103     |         |            | 3000    | 0,638 | 30  | X       | M     |

### A fixer avec:



Boulon à tête  
ronde  
autobloquant  
RB



Ecrou coulissant  
pour profil  
support  
PNP06-  
PNP12A

Matériel de fixation: 1 par mètre.