


SLOS

Cloison de séparation séparée

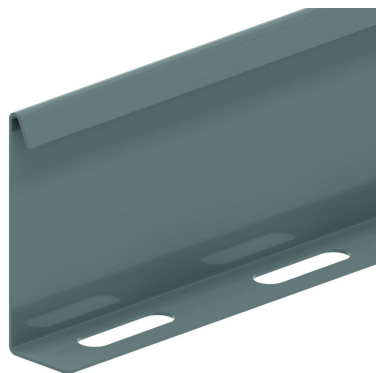

Exec. Std. Sendzimir

Mat. Opt.


Mat. Opt. PE Revêtement en poudre

HD	Référence	↑ mm	↔ mm	→ ← mm	↔ mm	kg/m	📦	Magasin	Unité
-	SLOS35	28			3000	0,330	150	X	M
-	SLOS60	53			3000	0,511	120	X	M
-	SLOS85	78			3000	0,680	60	X	M
-	SLOS110	103			3000	0,820	30	X	M
-	ZMSLOS35	28			3000	0,257	150	X	M
-	ZMSLOS60	60			3000	0,397	120	X	M
-	ZMSLOS85	78			3000	0,529	60		M
-	ZMSLOS110	103			3000	0,638	30	X	M

A fixer avec:



Boulon à tête
ronde
autobloquant
RB



Ecrou coulissant
pour profil
support
PNP06-
PNP12A

Matériel de fixation: 1 par mètre.