


# SLOS

## Cloison de séparation séparée

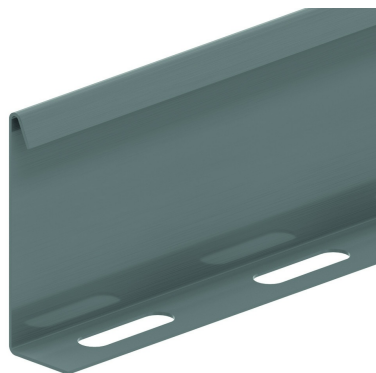


Exec. Std.

Sendzimir

Mat. Opt.

Mat. Opt. PE


Revêtement en poudre

HD	Référence	↕ mm	↔ mm	→  ← mm	↔ mm	kg/m		Magasin	Unité
-	<b>SLOS35</b>	28			3000	0,330	150	X	M
-	<b>SLOS60</b>	53			3000	0,511	120	X	M
-	<b>SLOS85</b>	78			3000	0,680	60	X	M
-	<b>SLOS110</b>	103			3000	0,820	30	X	M
-	<b>ZMSLOS35</b>	28			3000	0,257	150	X	M
-	<b>ZMSLOS60</b>	60			3000	0,397	120	X	M
-	<b>ZMSLOS85</b>	78			3000	0,529	60		M
-	<b>ZMSLOS110</b>	103			3000	0,638	30	X	M

### A fixer avec:



Boulon à tête  
ronde  
autobloquant  
RB



Ecrou coulissant  
pour profil  
support  
PNP06-  
PNP12A

Matériel de fixation: 1 par mètre.