


T

T-stuk

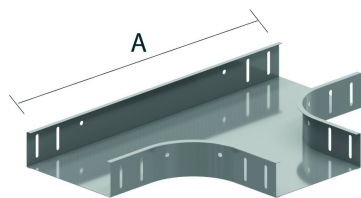

Ineenschuifbaar met de kabelbaan

Radius: 100 mm

Op aanvraag: Hoogte 35 mm - 85 mm - 110 mm

	50	75	100	150	200	300	400	500	600
A	458	483	508	558	608	708	808	908	1008

Te bevestigen met:



Zelfborgende
moer en bout
VM



Zelfborgende
moer en
kraagbout
VMK

Artikel	Afwerking	↕ mm	↔ mm	→ ← mm	↔ mm	kg/stk	📦	Eenh.
ZMT110.100	DF	110	100	0,75		1,265	1	STK
ZMT110.150	DF	110	150	0,75		1,538	1	STK
ZMT110.200	DF	110	200	0,75		1,838	1	STK
ZMT110.300	DF	110	300	0,75		2,522	1	STK
ZMT110.400	DF	110	400	0,75		3,315	1	STK
ZMT110.500	DF	110	500	0,75/0,9		5,098	1	STK
ZMT110.600	DF	110	600	0,75/0,9		6,380	1	STK
ZMT85.100	DF	85	100	0,75		1,108	1	STK
ZMT85.150	DF	85	150	0,75		1,374	1	STK
ZMT85.200	DF	85	200	0,75		1,668	1	STK
ZMT85.300	DF	85	300	0,75		2,338	1	STK
ZMT85.400	DF	85	400	0,75		3,117	1	STK
ZMT85.500	DF	85	500	0,75/0,9		4,887	1	STK
ZMT85.600	DF	85	600	0,75/0,9		6,155	1	STK
ZMT60.050	DF	60	50			0,722	1	STK
ZMT60.075	DF	60	75			0,835	1	STK
ZMT60.100	DF	60	100			0,954	1	STK
ZMT60.150	DF	60	150			1,213	1	STK
ZMT60.200	DF	60	200			1,500	1	STK
ZMT60.300	DF	60	300			2,156	1	STK
ZMT60.400	DF	60	400			2,922	1	STK
ZMT60.500	DF	60	500			4,678	1	STK
ZMT60.600	DF	60	600			5,932	1	STK

Minimum aantal bouten en moeren: 12 stuks.

Legende afwerking

- DF = Defender