


OBZ130

Open ophangbeugel

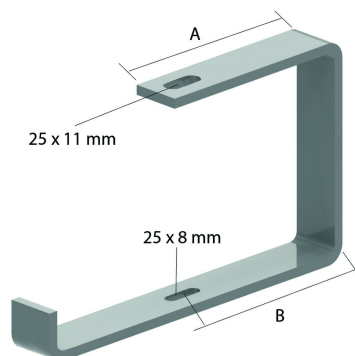

Geschikt voor montage aan het plafond of met draadstang TIM8 of TIM10.

| Artikel | Max. Belasting (in daN) | A | B |
|------------|-------------------------|-----|-------|
| OBZ130.075 | 80 | 64 | 42,5 |
| OBZ130.100 | 40 | 80 | 59,5 |
| OBZ130.150 | 50 | 105 | 84,5 |
| OBZ130.200 | 30 | 130 | 109,5 |
| OBZ130.250 | 50 | 155 | 134,5 |
| OBZ130.300 | 40 | 180 | 159,5 |
| OBZ130.400 | 30 | 230 | 209,5 |

| Artikel | ↕ mm | ↔ mm | → ← mm | ↔ mm | kg/stk | 📦 | Eenh. |
|-------------------|---------|---------|------------|---------|--------|----|-------|
| OBZ130.075 | 132 | 102 | | | 0,390 | 12 | STK |
| OBZ130.100 | 132 | 125 | | | 0,450 | 12 | STK |
| OBZ130.150 | 132 | 177 | | | 0,570 | 12 | STK |
| OBZ130.200 | 132 | 227 | | | 0,670 | 12 | STK |
| OBZ130.250 | 132 | 281 | | | 1,020 | 6 | STK |
| OBZ130.300 | 132 | 331 | | | 1,180 | 6 | STK |
| OBZ130.400 | 132 | 431 | | | 1,461 | 6 | STK |

Voor bevestiging van de kabelgoot met VM6.20.

Max. Belasting (daN): Gelijkmatic verdelc over de volledige breedte.