


# OBZ180

## Open ophangbeugel

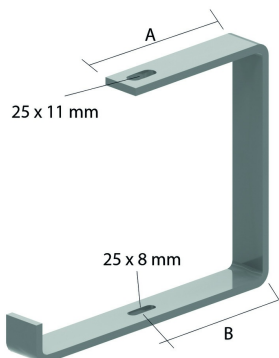

Geschikt voor montage aan het plafond of met draadstang TIM8 of TIM10.

Stand. Uitv.	Elektrolytisch verzinkt
Mat. Opt.	Hot-Dip
Mat. Opt. PE	Poedercoating

Artikel	Max. Belasting (in daN)	A	B
OBZ180.075	50	64	42,5
OBZ180.100	30	80	59,5
OBZ180.150	30	105	84,5
OBZ180.200	30	130	109,5
OBZ180.250	40	155	134,5
OBZ180.300	40	180	159,5
OBZ180.400	20	230	209,5

HD	Artikel	↕ mm	↔ mm	→  ← mm	↔ mm	kg/stk	📦	Stock	Eenh.
HD	<b>OBZ180.075</b>	182	102			0,460	12	X	STK
HD	<b>OBZ180.100</b>	182	125			0,510	12	X	STK
HD	<b>OBZ180.150</b>	182	177			0,630	12	X	STK
HD	<b>OBZ180.200</b>	182	227			0,720	12	X	STK
HD	<b>OBZ180.250</b>	182	281			1,100	6	X	STK
HD	<b>OBZ180.300</b>	182	331			1,270	6	X	STK
HD	<b>OBZ180.400</b>	182	431			1,500	6	X	STK

Te bestellen per volle verpakking.

Voor bevestiging van de kabelgoot met VM6.20.

Max. Belasting (daN): Gelijkmatic verdeeld over de volledige breedte.