


OBZ180

Open ophangbeugel

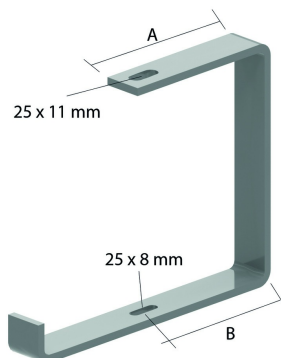

Geschikt voor montage aan het plafond of met draadstang TIM8 of TIM10.

Stand. Uitv.	Elektrolytisch verzinkt
Mat. Opt.	Hot-Dip
Mat. Opt. PE	Poedercoating

Artikel	Max. Belasting (in daN)	A	B
OBZ180.075	50	64	42,5
OBZ180.100	30	80	59,5
OBZ180.150	30	105	84,5
OBZ180.200	30	130	109,5
OBZ180.250	40	155	134,5
OBZ180.300	40	180	159,5
OBZ180.400	20	230	209,5

HD	Artikel	↕ mm	↔ mm	→ ← mm	↔ mm	kg/stk	📦	Stock	Eenh.
HD	OBZ180.075	182	102			0,460	12	X	STK
HD	OBZ180.100	182	125			0,510	12	X	STK
HD	OBZ180.150	182	177			0,630	12	X	STK
HD	OBZ180.200	182	227			0,720	12	X	STK
HD	OBZ180.250	182	281			1,100	6	X	STK
HD	OBZ180.300	182	331			1,270	6	X	STK
HD	OBZ180.400	182	431			1,500	6	X	STK

Te bestellen per volle verpakking.
 Voor bevestiging van de kabelgoot met VM6.20.
 Max. Belasting (daN): Gelijkmatic verdeeld over de volledige breedte.