


VMB

Vloer- en muurbeugel

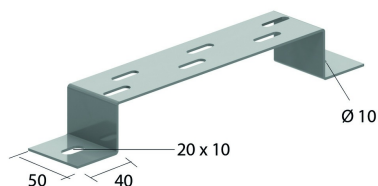

Geschikt voor gebruik als vloer-, muur- en ophangbeugel.

Max. Belasting: 200 daN

| Artikel | Afwerking | ↑ mm | ↔ mm | → ← mm | ↔ mm | kg/stk | 📦 | Eenh. |
|-----------------|-----------|---------|---------|------------|---------|--------|----|-------|
| ZMVMB100 | DF | 40 | 100 | | | 0,208 | 12 | STK |
| ZMVMB150 | DF | 40 | 150 | | | 0,220 | 12 | STK |
| ZMVMB200 | DF | 40 | 200 | | | 0,289 | 12 | STK |
| ZMVMB300 | DF | 40 | 300 | | | 0,370 | 12 | STK |
| ZMVMB400 | DF | 40 | 400 | | | 0,451 | 6 | STK |
| ZMVMB500 | - | | 500 | | | 0,498 | 6 | STK |
| ZMVMB600 | - | | 600 | | | 0,576 | 6 | STK |
| VMB100 | SZ | 40 | 100 | | | 0,190 | 12 | STK |
| VMB150 | SZ | 40 | 150 | | | 0,220 | 12 | STK |
| VMB200 | SZ | 40 | 200 | | | 0,260 | 12 | STK |
| VMB300 | SZ | 40 | 300 | | | 0,330 | 12 | STK |
| VMB400 | SZ | 40 | 400 | | | 0,390 | 6 | STK |
| VMB500 | SZ | 40 | 500 | | | 0,460 | 6 | STK |
| VMB600 | SZ | 40 | 600 | | | 0,530 | 6 | STK |

Vloer- en ophangbeugel: montage met VFCL.
Muurbeugel: montage met VFK.

Legende afwerking

- DF = Defender
- SZ = Sendzimir