



DR15.30 Draagprofiel



16 x 12 mm

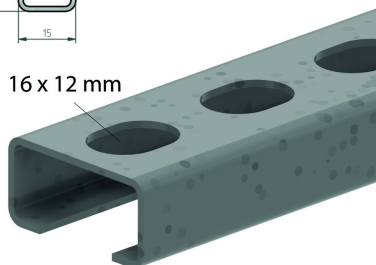

Max. Belasting: 100 daN

Stand. Uitv. Sendzimir

Mat. Opt. Hot-Dip

Mat. Opt. PE Poedercoating

HD Artikel	↕ mm	↔ mm	→ ← mm	↔ mm	kg/stk	📦	Stock	Eenh.
HD DR100	15	30		100	0,060	10	X	STK
HD DR150	15	30		150	0,080	10	X	STK
HD DR200	15	30		200	0,110	10	X	STK
HD DR250	15	30		250	0,130	10	X	STK
HD DR300	15	30		300	0,160	10	X	STK
HD DR350	15	30		350	0,190	10	X	STK
HD DR15.30.2000	15	30		2000	0,600	40		M

Te bevestigen met twee draadstangen TIM8 + moer M8 + CRO8.
Bestel steeds breedte kabelbaan + 50 mm.