


DR21.41

Draagprofiel

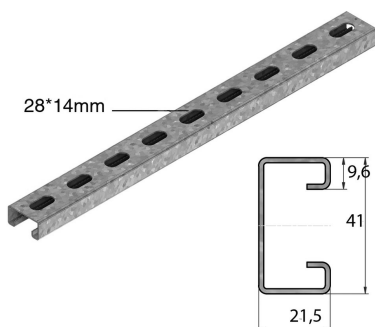

Max. Belasting: 150 daN

Stand. Uitv. Sendzimir

Mat. Opt. Hot-Dip

Mat. Opt. PE Poedercoating

HD	Artikel	↑ mm	↔ mm	→ ← mm	↔ mm	kg/stk	📦	Stock	Eenh.
HD	DR450	21	41		450	0,500	6	X	STK
HD	DR550	21	41		550	0,620	6	X	STK
HD	DR650	21	41		650	0,700	6	X	STK

Te bestellen per volle verpakking.

Te bevestigen met twee draadstangen TIM10 + moer M10 + CRO10.

Bestel steeds breedte kabelbaan + 50 mm.