


HDPIPE80S

Geperforeerd I profiel

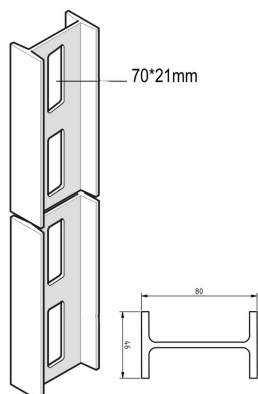

Stand. Uitv.		Hot-Dip							
Mat. Opt. PE		Duplex							
HD	Artikel	↑ mm	↔ mm	→ ← mm	↔ mm	kg/m	📦	Stock	Eenh.
-	HDPIPE80S	80	46		6000	5,610	6	X	M

Weerstandsmoment: $W_x = 19,96 \text{ cm}^3$.
Beschermdop in gele PVC: DOPIPE80.